

Printing Films

Compression:	Offset Printing UV
Films:	Laterally incorrect, negative With marks for fit and colour specifications Please include all the measured frame lines on the printing films, according to the template
Number of Colours:	max. 5 colours (incl. white background) + lacquer surface
Colour Scales:	Euro Scale only (C,M,Y,K)
Font Size:	min. 5 points
Raster Type:	Point, chaining or elliptical point
Raster Size:	68 lines per cm (175 lpi)
Raster Angles:	C 15°, M 75°, Y 0°, K 45°
Film Density:	min. D=4, max. D=5
Colour Proof:	For euro scale printing we always need a relevant colour proof. ATTENTION: Printouts from laser or inkjet printers are not colourfast and cannot be accepted as a colour proof.
White Background:	Label prints who have to correspondent with the proof need to be pre-printed with a white background. Without white pre-printing the surface of the CD/ DVD / CarD appears silvery. For offset printing always deliver the white film as a Screen printing film.

Offset printing is not available for CD-Recordables and CarD-Recordables!


Important:

Please do not cross the maximum outer diameter and keep the minimum diameter of the centre space. You don't have to cut out the area of the staple ring but we recommend not to place any written text within it (no warranty zone).


Delivered file formats for graphics

Data Transfer:	ISDN +41(0)55 450 00 62 Please call us before you start transmitting the file.
Data Carrier:	CD-R Floppy Disk 3.5" ZIP JAZ
Data Format:	EPS-File All fonts vectorised, pictures fixed or as TIF
Resolution:	min. 305 dpi
Our programs:	We work on Macintosh with - Adobe Illustrator 9.0 - Adobe PhotoShop 5.0 - Quark X-Press 4.0


Offset Printing CD

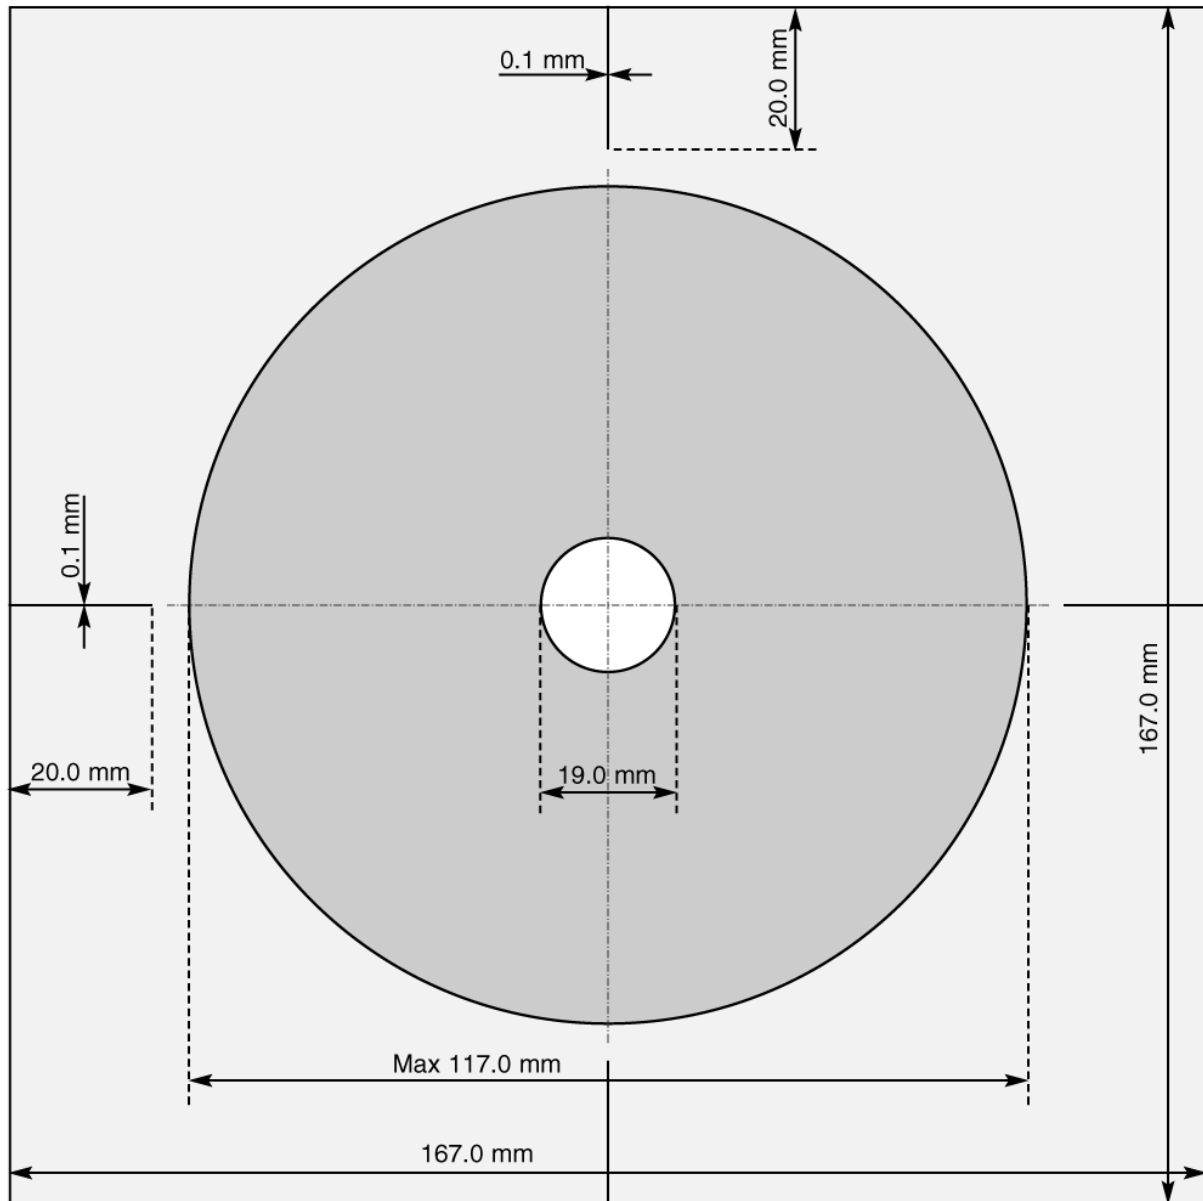

Offset Printing DVD5 + DVD9

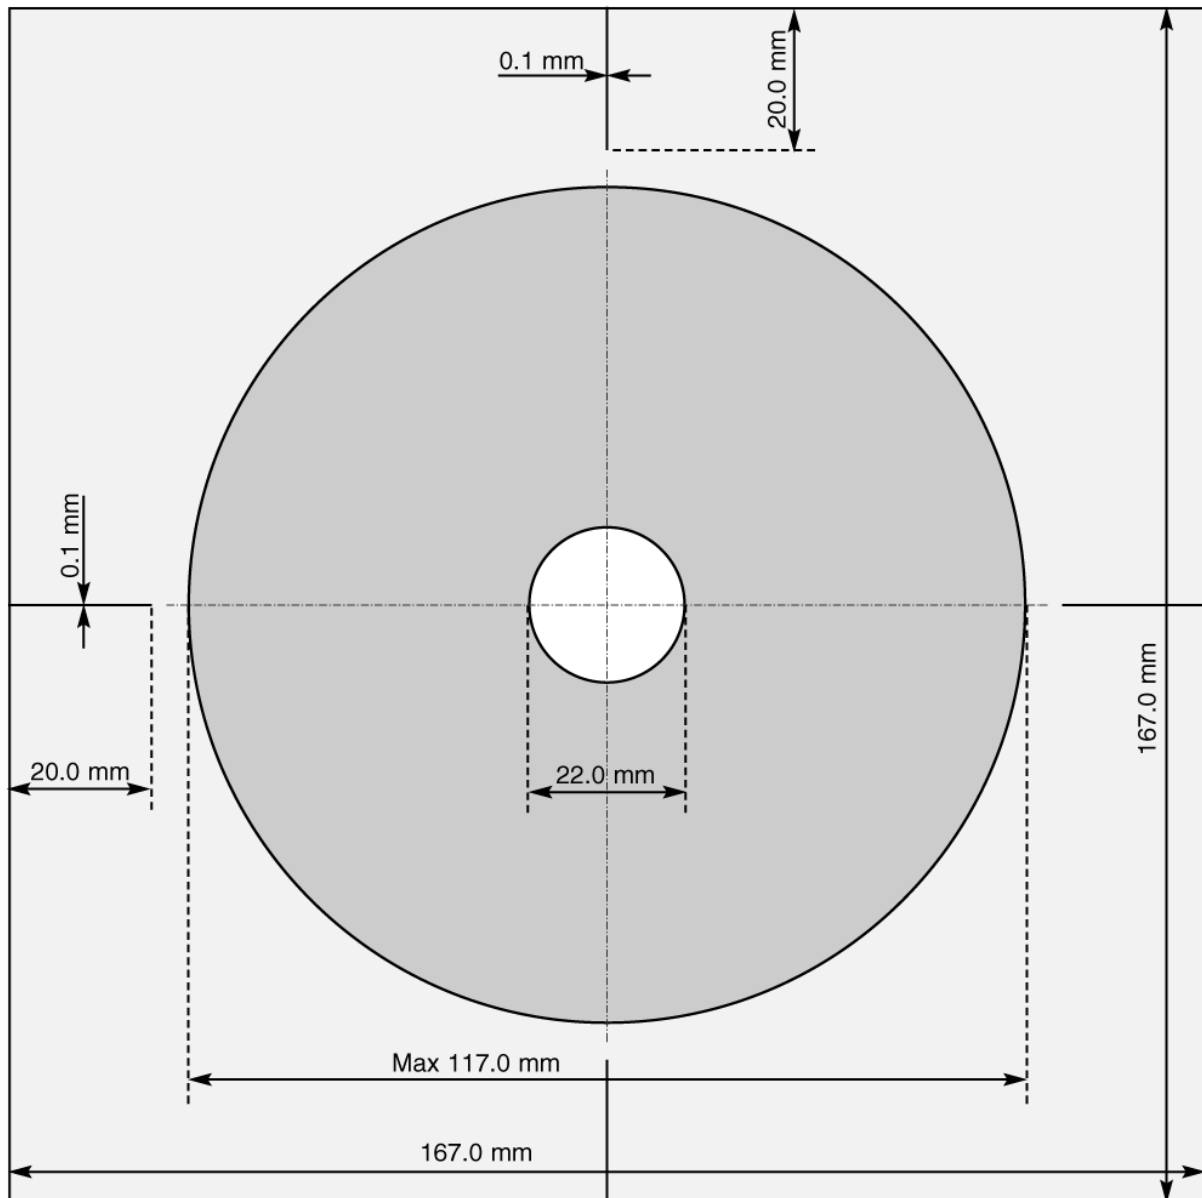

Offset Printing Mini-CD 8cm

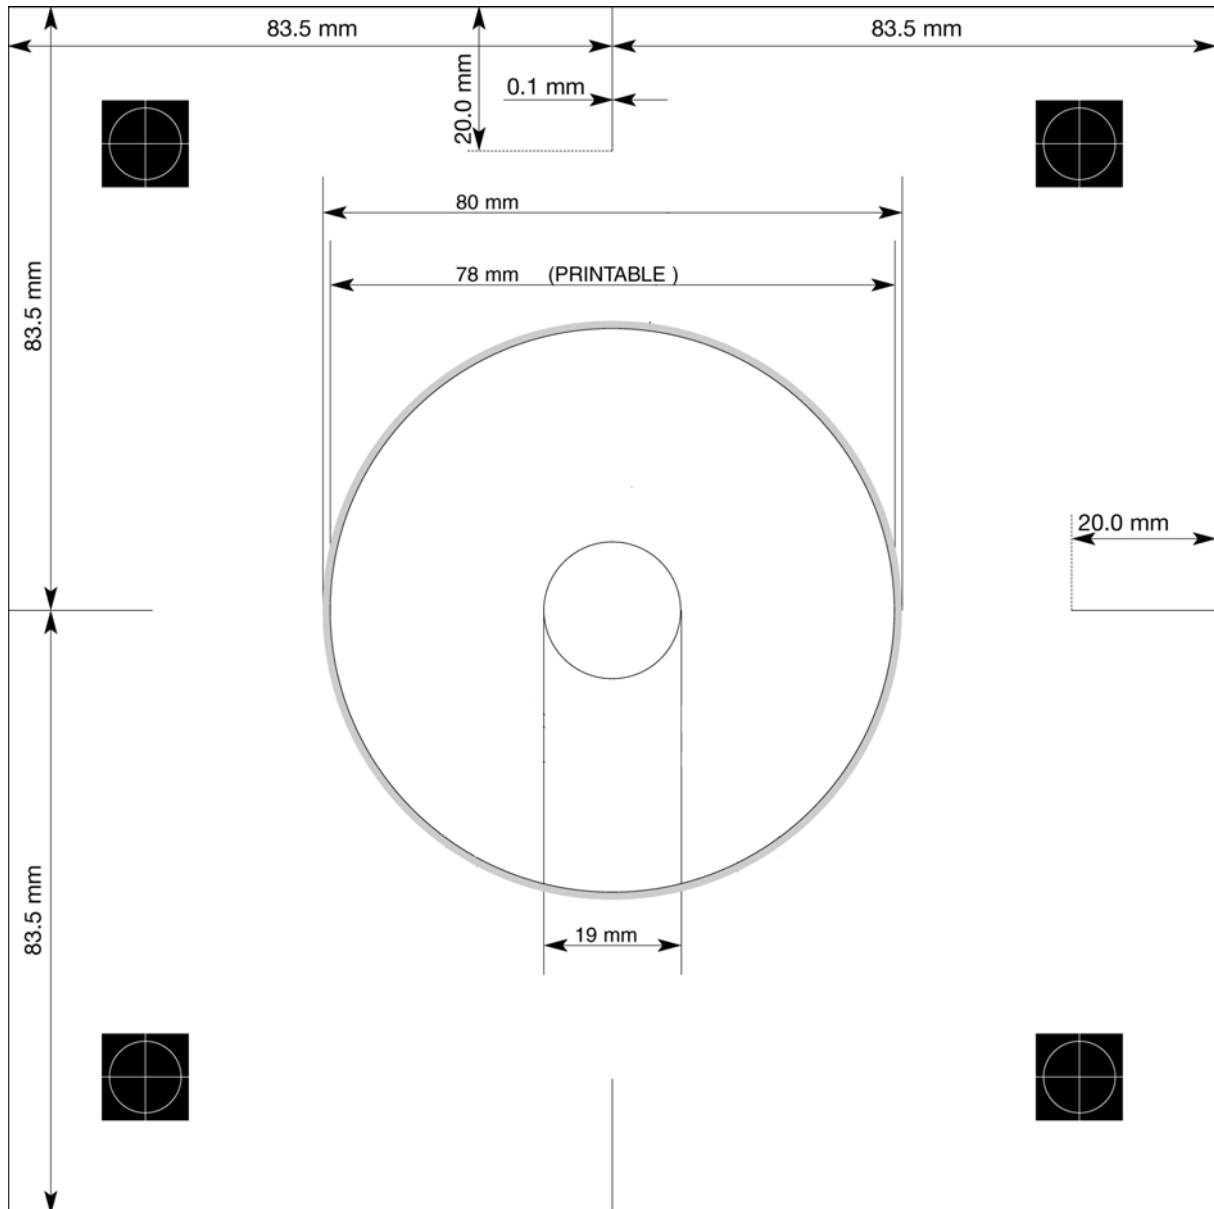

Offset Printing Step-CarD 80MB

